


This screw is left loose for packaging and shipping. Adjust the mirror angle to your desired position, then tighten the screw. Do not exceed 5 Nm (44 in-lb).

M5 x 10mm Countersunk Do not exceed 5 Nm (44 in-lb)! -The mirror glass is mounted on a ball pivot and can be adjusted independent of the housing. -M6 x 20 Countersunk -M6 x 12 Countersunk Mirror Base-Door M6 x 30mm Stud –M6 Flange Nut Rubber Gasket-


EVS Tuning GTLM Mirror Assembly Honda S2000

– M6 Flange Nut


Contents	
Qty	Description
1	Left Side Mirror Assembly
1	Right Side Mirror Assembly
1	Left Side Base Plate
1	Right Side Base Plate
2	Rubber Gasket
2	M6x25 Countersunk Screw
2	M6x12 Countersunk Screw
2	M6x30 Stud
4	M6 Flange Nut

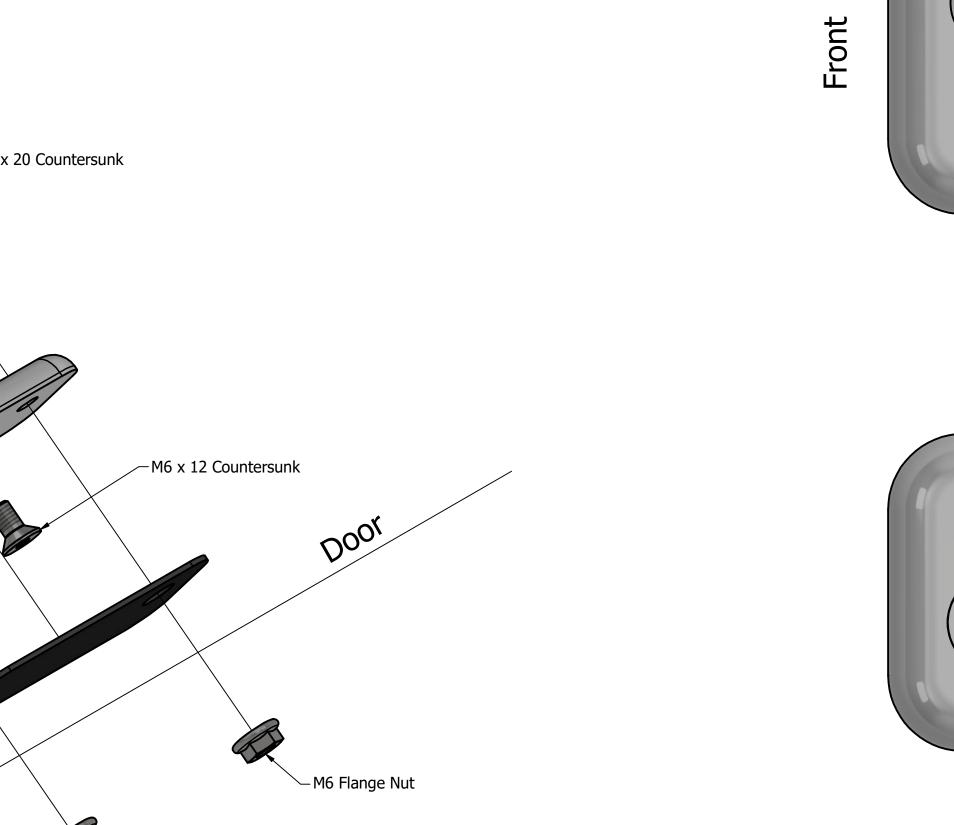

Right Side

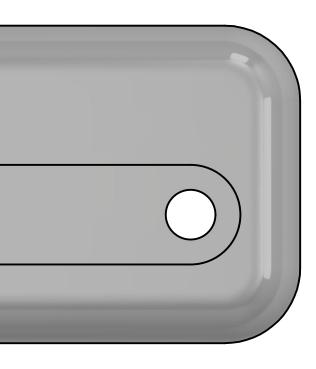

Left Side



Front